
ART 330HW
PN20 Bronze Gate Valve




Features

- Screwed BSP Taper (ISO 7/1) or NPT (ANSI B1.20.1)
- Non Rising Stem
- BS5154 / MSS-SP-80

WRAS APPROVED PRODUCT


Available on bimstore.co

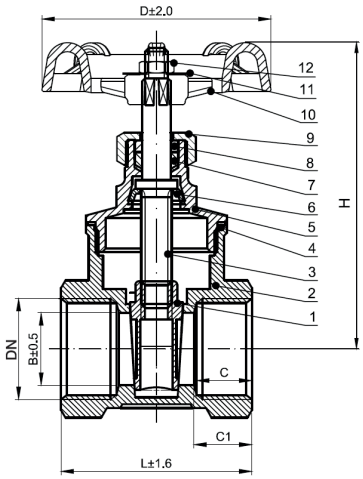

Technical data
Max pressure: 20 Bar
Working temp: -10°C to +170°C

DN	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
L	45	48.5	55	61	63	73
H	71.5	81.0	94.7	108.0	122.5	147.0
D	53	60	72	72	80	100
B	15	20	25	32	38	50
C	12.0	12.5	14.0	15.0	15.0	17.5
C1	13.2	13.5	15.2	16.0	16.5	19.0
Kv	13.5	27.5	35.3	85.0	126.4	176.0
Kgs	0.28	0.38	0.57	0.86	1.02	1.78

N.	Part Name	Materials
1	Disc	Bronze ASTM B62 C83600/CC491K
2	Body	Bronze ASTM B62 C83600/CC491K
3	Stem	DZR CW602N ASTM C35330
4	Washer	PTFE
5	Bonnet	Bronze ASTM B62 C83600/CC491K
6	Lock Nut	Brass Hpb58-2 (C38000) ASTM B455
7	Packing	PTFE
8	Gland	Brass Hpb58-2 (C38000) ASTM B455
9	Packing Nut	Brass Hpb58-2 (C38000) ASTM B455
10	Handwheel	Cast Iron HT200 ASTM A48
11	Nameplate	Aluminium
12	Hex Nut	Stainless Steel 304 ASTM A240

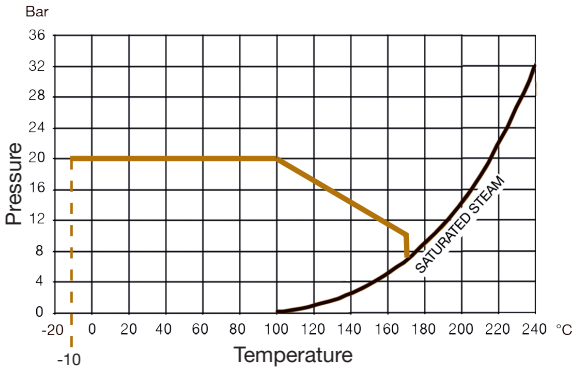

V2. Dimensions in mm

This data sheet is designed as a guide and should not be regarded as wholly accurate in every detail. We reserve the right to amend the specification of any product without notice.