


Ductile Iron Y Strainer, Flange End (YSD102)

It can be customized specially according to dients requirements.



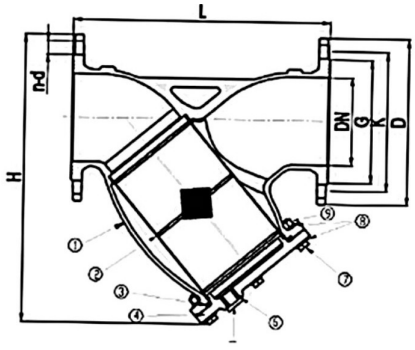

NO	Name	Material
1	Body	GGG50
2	Screen	SS304
3	O-ring	NBR
4	Bonnet	GGG50
5	Plug	Brass
6	O-ring	NBR
7	Bolt	SS304
8	Washer	SS304
9	Nut	SS304

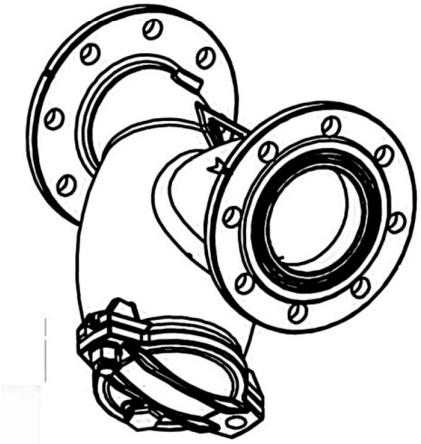

Specifications	
Flange	EN1092-2, AS 4087 ASME B16. 1/B16.42
Face to face	BS2080 DINFI ASME B16.10

DN	OUTLINE mm			END Flange PN10/16-CL125/150mm								
	DIN-F1	BS2080	ASMS B16.10	EN 1092-2			-			-		
	L			D	k	n-d	D	k	n-d	D	K	n-d
40	200	-	200	150	110	4-Ø19	127	98.5	4-Ø16	-	-	-
50	230	220	225.4	165	125	4-Ø19	152	120.5	4-Ø19	-	-	-
65	290	270	273	185	145	4-Ø19	178	139.5	4-Ø19	-	-	-
80	310	290	292	200	160	8-Ø19	191	152.5	4-Ø19	185	146	4-Ø18
100	350	350	352.4	220	180	8-Ø19	229	190.5	8-Ø19	215	178	4-Ø18
125	400	390	416	250	210	8-Ø19	254	216	8-Ø22	-	-	-
150	480	440	470	285	240	8-Ø23	279	241.5	8-Ø22	280	235	8-Ø18
200	600	540	543	340	295	8-Ø23/ 12-Ø23	343	298.5	8-Ø22	355	292	8-Ø18
250	730	660	660.4	395/405	350/355	12-Ø23/ 12-Ø28	406	362	12-Ø25	405	356	8-Ø22
300	850	720	762	445/460	400/410	12-Ø23/ 12-Ø28	483	432	12-Ø25	455	406	12-Ø22