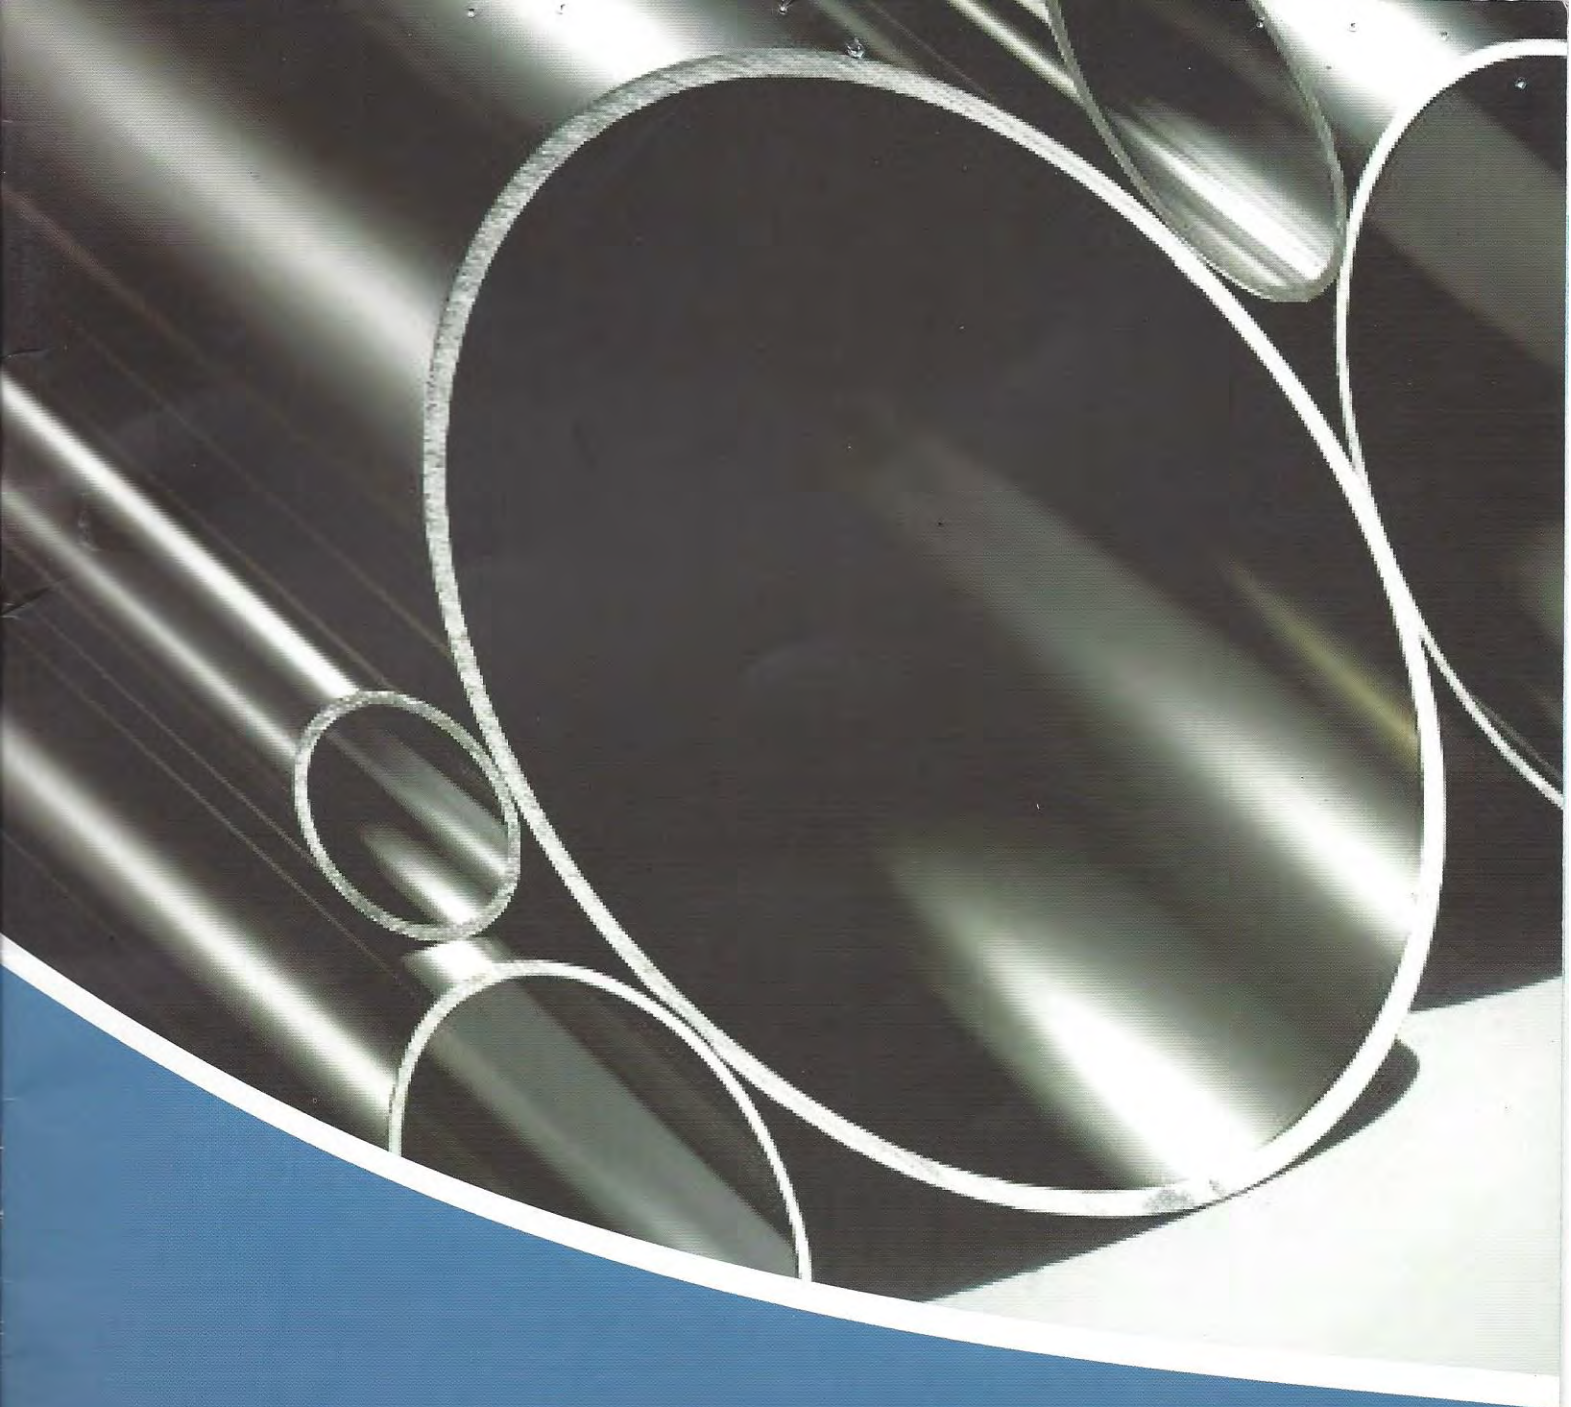


SEAMLESS AND WELDED CARBON STEEL PIPE

METAL & STEEL FABEX MIDDLE EAST 2016
3 HALL B9-3

MEICAI
METAL

TIANJIN MEICAI METAL TRADING CO.,LTD
TIANJIN JIEFENG STEEL PIPE MANUFACTURE CO.,LTD

MEICAI
METAL




About us

Tianjin Meicai Metal Trading Co. Ltd was founded in 2006, located in Beichen District, Tianjin, China. We specialized in producing high-quality seamless pipes/tubes and welding pipes for low and medium pressure, liquid service and structure purpose. Black/Galvanized, Plain End/Beveled End, Threading and Coupling are available. We acquired the Certificates of NDT System, and the authentication of GB/T 19001-2000 and ISO9001:2000 International Quality System. We realized a new leap in product quality and business management during our insistent efforts.

For years we insist on the management theory of quality first and customer supreme, and constantly improving our quality management system and our products according to the requirements of our customers.

We sincerely hope to cooperate with friends in every field both at home and abroad. We will keep our promise and faith, and try our best to realize mutual benefit and get more progress.

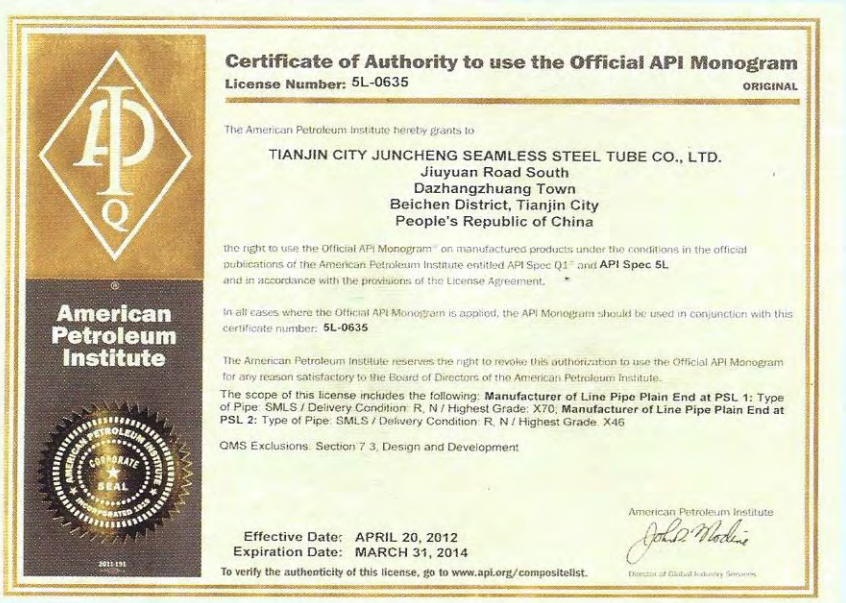

Certificate of Authority to use the Official API Monogram

License Number: 5L-0635 **ORIGINAL**

The American Petroleum Institute hereby grants to

TIANJIN CITY JUNCHENG SEAMLESS STEEL TUBE CO., LTD.
Jiuyuan Road South
Dazhangzhuang Town
Beichen District, Tianjin City
People's Republic of China

the right to use the Official API Monogram® on manufactured products under the conditions in the official publications of the American Petroleum Institute entitled API Spec Q1® and **API Spec 5L** and in accordance with the provisions of the License Agreement.

In all cases where the Official API Monogram is applied, the API Monogram should be used in conjunction with this certificate number: **5L-0635**

The American Petroleum Institute reserves the right to revoke this authorization to use the Official API Monogram for any reason satisfactory to the Board of Directors of the American Petroleum Institute.

The scope of this license includes the following: **Manufacturer of Line Pipe Plain End at PSL 1:** Type of Pipe: SMLS / Delivery Condition: R, N / Highest Grade: X70; **Manufacturer of Line Pipe Plain End at PSL 2:** Type of Pipe: SMLS / Delivery Condition: R, N / Highest Grade: X46

QMS Exclusions: Section 7.3, Design and Development

American Petroleum Institute


Effective Date: APRIL 20, 2012
Expiration Date: MARCH 31, 2014

To verify the authenticity of this license, go to www.api.org/compositelist.

Director of Global Industry Services

American Petroleum Institute

CORPORATE SEAL

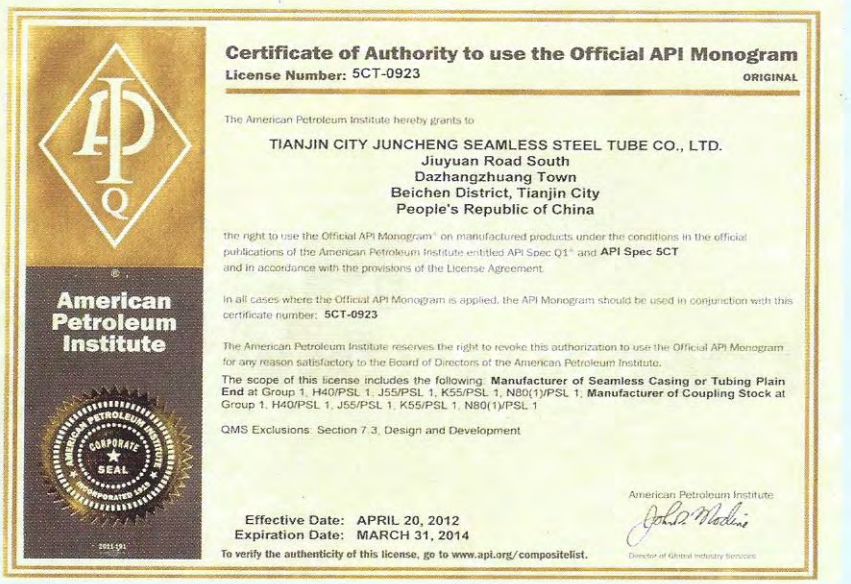

Certificate of Authority to use the Official API Monogram

License Number: 5CT-0923 **ORIGINAL**

The American Petroleum Institute hereby grants to

TIANJIN CITY JUNCHENG SEAMLESS STEEL TUBE CO., LTD.
Jiuyuan Road South
Dazhangzhuang Town
Beichen District, Tianjin City
People's Republic of China

the right to use the Official API Monogram® on manufactured products under the conditions in the official publications of the American Petroleum Institute entitled API Spec Q1® and **API Spec 5CT** and in accordance with the provisions of the License Agreement.

In all cases where the Official API Monogram is applied, the API Monogram should be used in conjunction with this certificate number: **5CT-0923**

The American Petroleum Institute reserves the right to revoke this authorization to use the Official API Monogram for any reason satisfactory to the Board of Directors of the American Petroleum Institute.

The scope of this license includes the following: **Manufacturer of Seamless Casing or Tubing Plain End** at Group 1, H40/PSL 1, J55/PSL 1, K55/PSL 1, N80(1)/PSL 1; **Manufacturer of Coupling Stock** at Group 1, H40/PSL 1, J55/PSL 1, K55/PSL 1, N80(1)/PSL 1

QMS Exclusions: Section 7.3, Design and Development

American Petroleum Institute

Effective Date: APRIL 20, 2012
Expiration Date: MARCH 31, 2014

To verify the authenticity of this license, go to www.api.org/compositelist.

Director of Global Industry Services

American Petroleum Institute

CORPORATE SEAL

Products:

- **Carbon Steel Seamless Pipe**
  Standard:
  API 5L B,ASTM A106 GR.B,ASTM A53 GR.B
  BS1387/1985,DIN 2440
- **Tubing & Casing Pipe**
  Standard:
  API 5L B/5CT
- **Pre-Galvanized Steel Pipe**
  ◎Round
  ◎Square and Rectangular pipe
- **ERW Steel Pipe**
  Standard:
  API 5L B,ASTM A53 GR. A/B,BS1387/1985,
  DIN 2440
  ◎Round
  ◎Square and Rectangular pipe



CQC

QUALITY MANAGEMENT SYSTEM CERTIFICATE

Certificate No: 00112021965R1S/1200

We hereby certify that
Tianjin Meicai Metal Trading Co., Ltd

Room 1202, Beichen Building A, Jiuyuan Road, Beichen District, Tianjin, China

has been assessed and found to conform to the requirements of

Quality Management System

This certificate for compliance with the standard
ISO9001: 2008
GB/T 19001-2008

The Quality Management System applies to the following area:
Export Trading of Steel Pipe

Certified since: Mar. 02, 2009 Valid from: Mar. 02, 2012 Valid until: Mar. 01, 2015

CMS IAF Signed by: Wang Keyao


CHINA QUALITY CERTIFICATION CENTRE

Q 0097688

MEICAI
METAL


Manufacturing Process


ERW steel pipe

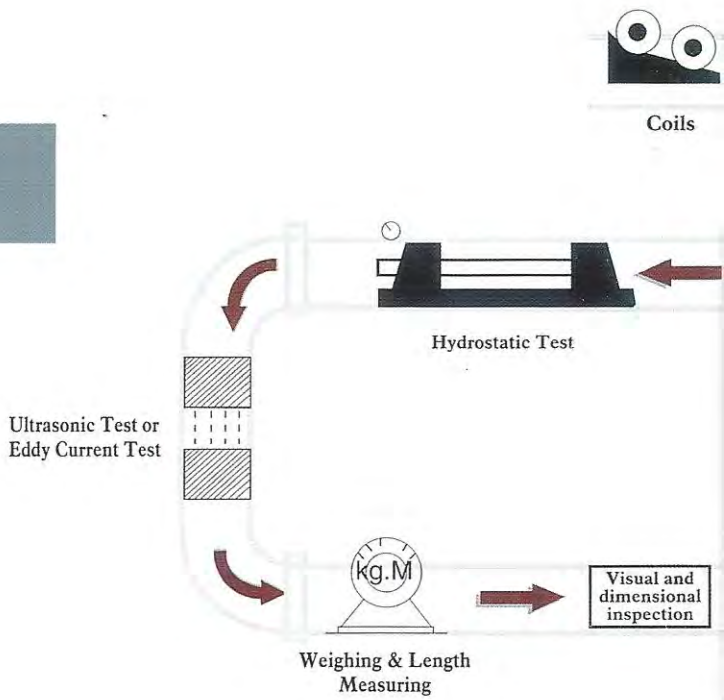



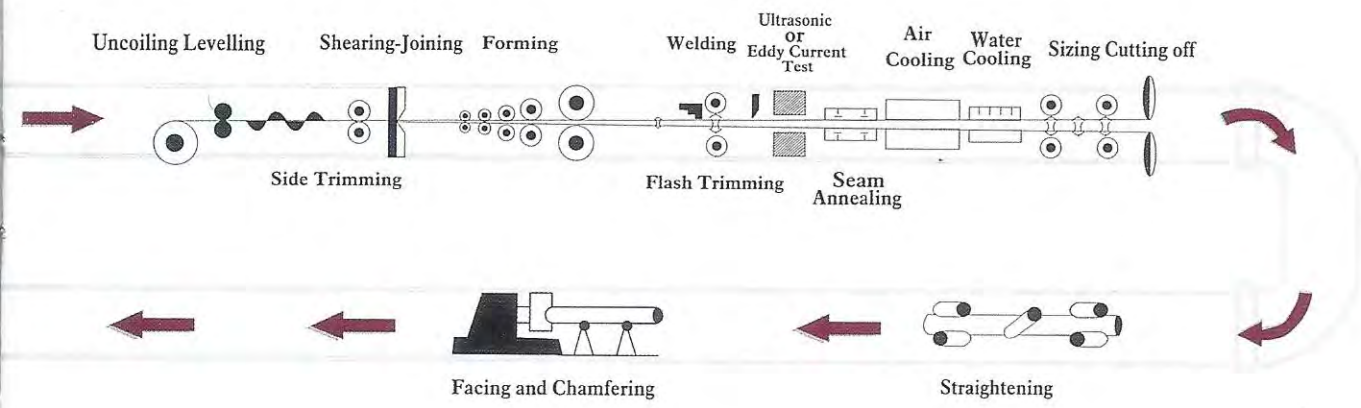



Uncoiling Levelling
Shearing-Joining
Forming
Welding
Ultrasonic or Eddy Current Test
Air Cooling
Water Cooling
Sizing Cutting off
Side Trimming
Flash Trimming
Seam Annealing
Facing and Chamfering
Straightening

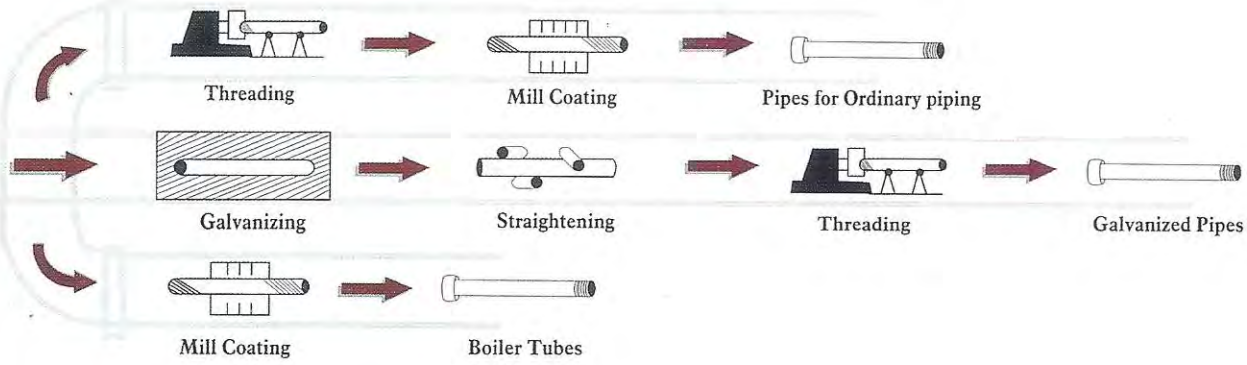

Threading
Mill Coating
Pipes for Ordinary piping
Galvanizing
Straightening
Threading
Galvanized Pipes
Mill Coating
Boiler Tubes





API 5L B PSL1/E.R.W

Seamless steel pipe

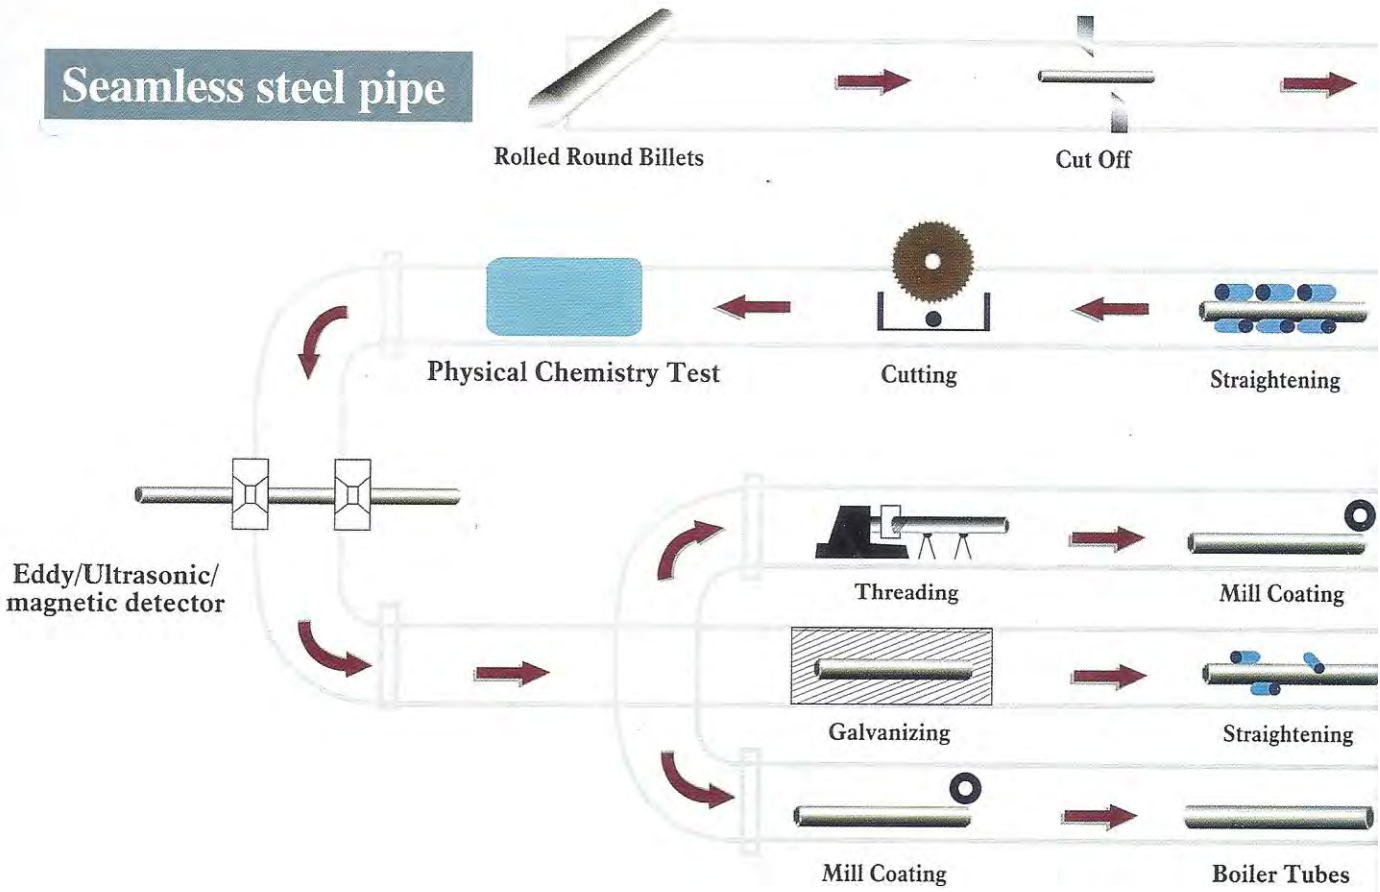

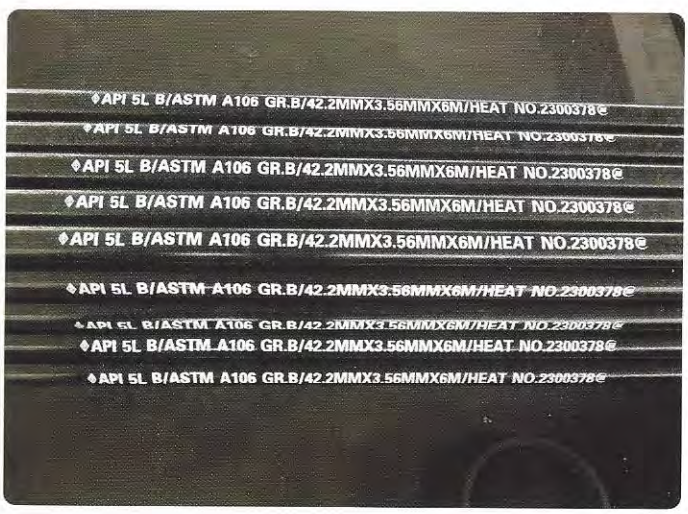

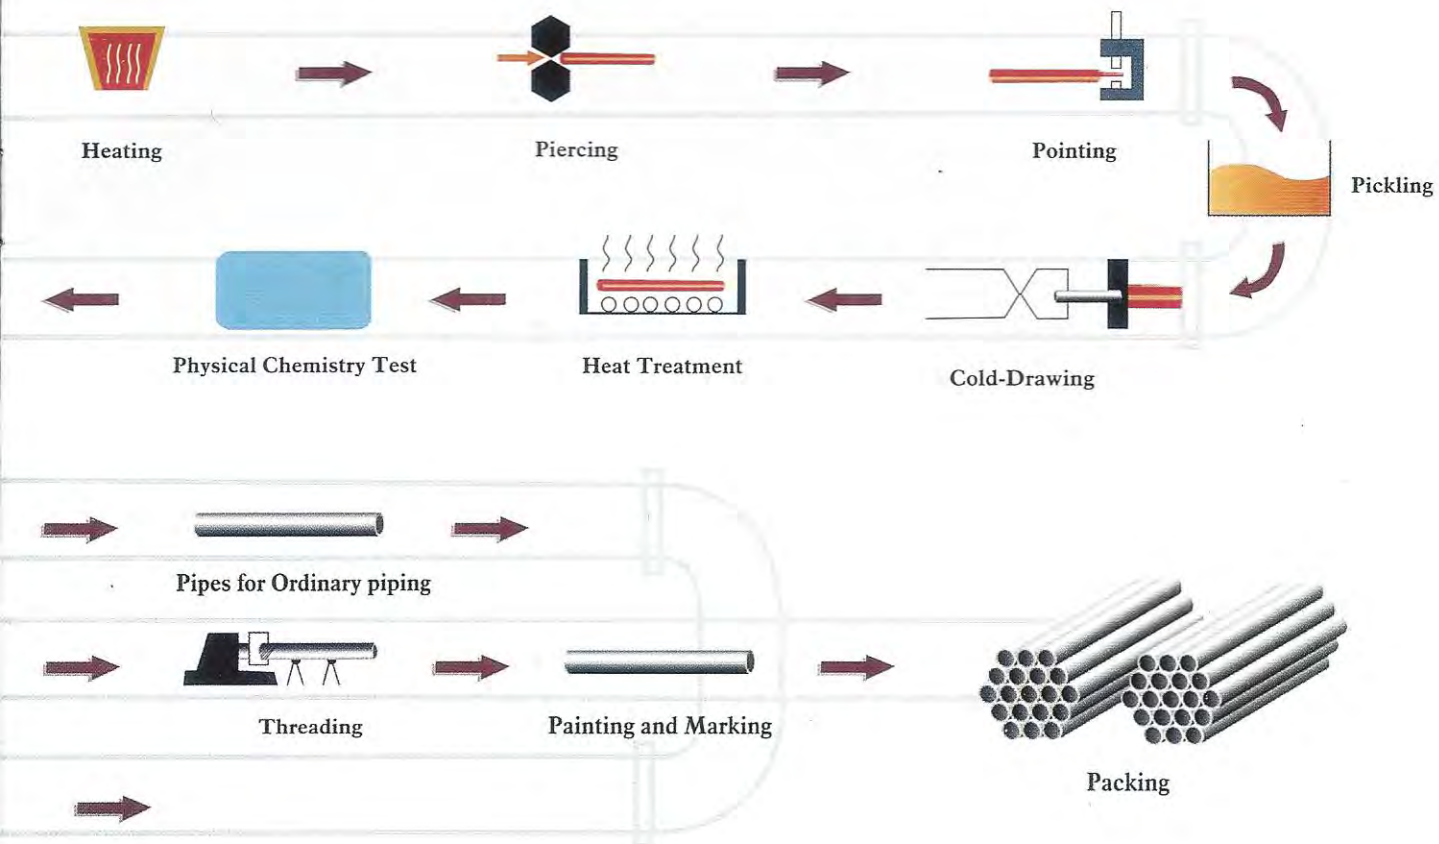


Heating
Piercing
Pointing
Pickling
Cold-Drawing
Heat Treatment
Physical Chemistry Test
Pipes for Ordinary piping
Threading
Painting and Marking
Packing





MEICAI
METAL

Product Specifications

美标防爆型导线管（IMC）
Intermediate Metal Conduit

Size	Outside Diameter		Inside Diameter		Wall Thickness		Length	
inch	inch	mm	inch	mm	(1)mm	(2)mm	feet	mm
1/2″	0.815	20.70	0.660	16.76	1.97	1.79	10	3050
3/4″	1.029	26.14	0.869	22.07	2.10	2.10	10	3050
1″	1.290	32.77	1.105	28.07	2.35	2.35	10	3050
1–1/4″	1.638	41.61	1.448	36.78	2.41	2.41	10	3050
1–1/2″	1.883	47.83	1.683	42.75	2.54	2.29	10	3050
2″	2.360	59.94	2.150	54.61	2.67	2.41	10	3050
2–1/2″	2.857	72.57	2.557	64.95	3.81	—	10	3050
3″	3.476	88.29	3.176	80.67	3.81	—	10	3050
3–1/2″	3.971	100.86	3.671	93.24	3.81	—	10	3050
4″	4.466	113.44	4.166	105.82	3.81	—	10	3050

美标导线管（EMT）
Electrical Metallic Tubing


Size	Outside Diameter		Inside Diameter		Wall Thickness		Length	
inch	inch	mm	inch	mm	(1)mm	(2)mm	feet	mm
1/2″	0.706	17.93	0.622	15.80	1.07	0.85	10	3050
3/4″	0.922	23.42	0.824	20.93	1.25	1.00	10	3050
1″	1.163	29.54	1.049	26.64	1.45	1.10	10	3050
1–1/4″	1.510	38.35	1.380	35.05	1.65	1.30	10	3050
1–1/2″	1.740	44.20	1.610	40.89	1.65	1.30	10	3050
2″	2.196	55.78	2.067	52.50	1.65	1.40	10	3050
2–1/2″	2.875	73.03	2.731	69.37	1.83	—	10	3050
3″	3.500	88.90	3.356	85.24	1.83	—	10	3050
3–1/2″	4.000	101.60	3.834	97.38	2.11	—	10	3050
4″	4.500	114.30	4.334	110.08	2.11	—	10	3050

英标导线管（BS4568：1970）

Size	Outside Diameter		Wall Thickness		Length
	MIN	MAX	1	2	
20mm	19.7mm	20.0mm	1.6mm	1.35mm	3.75metre
20mm	24.6mm	25.0mm	1.6mm	1.35mm	3.75metre
25mm	31.6mm	32.0mm	1.6mm	1.35mm	3.75metre

英标导线管（BS31：1940）

Size	Outside Diameter		Wall Thickness		Length
	MIN	MAX	1	2	
3/4″	18.8mm	19.1mm	1.6mm	1.35mm	3.75metre
1″	25.1mm	25.4mm	1.6mm	1.35mm	3.75metre
1–1/4″	31.5mm	31.8mm	1.6mm	1.35mm	3.75metre

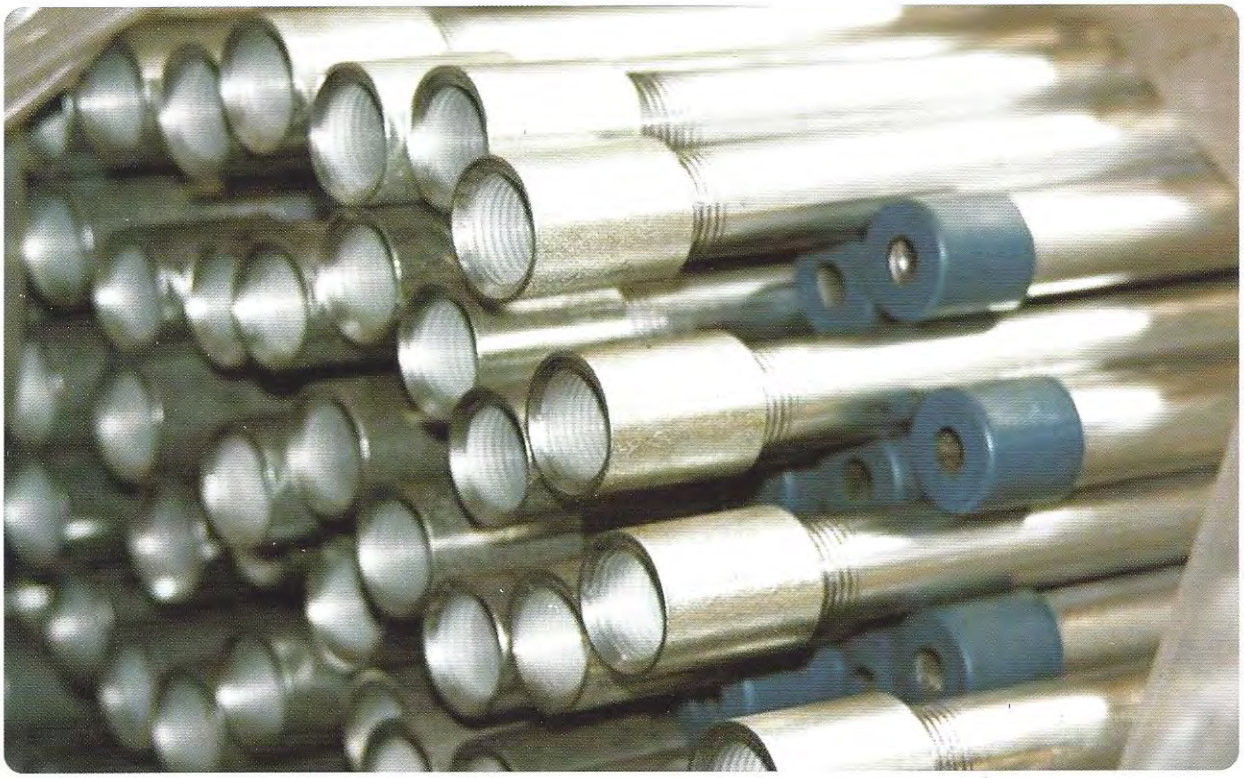

MEICAI
METAL

STEEL PIPE



· SEAMLESS STEEL PIPE

Name	Specification ODXWT MM	Executive Standard	Main Application
SEAMLESS STEEL PIPE	O.D.: 1/8″ – 24″ (6.0MM–610MM) W.T.: 1MM–60MM	ASTM A53/A106, DIN 2440/2448, BS1387	Mechanical and pressure used and transporting steam,water,gas.



· ERW STEEL PIPE

Name	Specification ODXWT MM	Executive Standard	Main Application
ERW STEEL PIPE	O.D.: 1/2″ –24″ (21.3MM– 610MM) W.T.: SCH20, SCH40, SCH80	API 5L, API 5CT, ASTM A53, ASTM A252, ASTM A500, BS1387, DIN2440	Oil and structural in low pressure liquid and gassy transportation, building and bridge fields.



· HOT DIPPED GALVANIZED STEEL PIPE


Name	Specification ODXWT MM	Executive Standard	Main Application
HOT DIPPED GALVANIZED STEEL PIPE	O.D.: 1/2″ –12″ W.T.: 1.0MM–20MM	ASTM–A53A/B, BS1387–1985, DIN 2440	Water and gas transportation and structure used.

· PRE-GALVANIZED STEEL PIPE



Name	Specification ODXWT MM	Executive Standard	Main Application
PRE-GALVANIZED STEEL PIPE	O.D.: 16MM- 114MM W.T.: 0.7MM-3.0MM	BS1387, BS4568,EMT, EN1139, ASTM A53	Electrical transportation,water pipe,heating pipe and structure.

· SQUARE AND RECTANGULAR PIPE

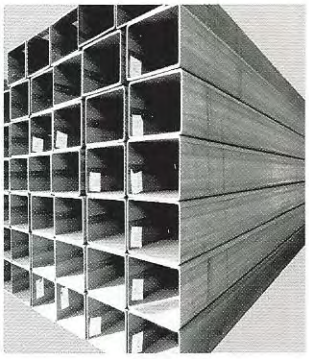

Name	Specification ODXWT MM	Executive Standard	Main Application
SQUARE AND RECTANGULAR PIPE	O.D.:20MM X 15MM-500MM X 500MM W.T.: SCH20-SCH40	EN10219, EN10210, ASTM A500	Steel structure, bridge, bus, ship making.

· API 5CT CASING AND TUBING



Name	Specification ODXWT MM	Executive Standard	Main Application
CASING AND TUBING	Casing O.D.:4 1/2″ -20″ W.T.:5.21MM-12.7MM Tubing O.D.:1.05″ -4 1/2″ W.T.:2.87MM-6.88MM	API 5CT	Extracting petroleum and natural gas.

MEICAI
METAL

Steel Tubes and Tubulars Suitable for Screwing to BS 21 Pipe Threads

BS 1387–1985

Tube	Nominal Size		Outside Diameter				Wall Thickness		Weight					
			max.		min.				Plain Ends			Screwed and Socketed		
	in.	mm	in.	mm	in.	mm	in.	mm	lb/ft	kg/ft	kg/m	lb/ft	kg/ft	kg/m
Light	1/4	8	0.535	13.6	0.520	13.2	0.071	1.8	0.346	0.157	0.515	0.349	0.158	0.519
	3/8	10	0.673	17.1	0.657	16.7	0.071	1.8	0.450	0.204	0.670	0.454	0.206	0.676
	1/2	15	0.843	21.4	0.827	21.0	0.079	2.0	0.636	0.289	0.947	0.642	0.291	0.956
	3/4	20	1.059	26.9	1.039	26.4	0.091	2.3	0.927	0.421	1.380	0.934	0.424	1.390
	1	25	1.331	33.8	1.307	33.2	0.102	2.6	1.331	0.603	1.980	1.344	0.610	2.000
	1 1/4	32	1.673	42.5	1.650	41.9	0.102	2.6	1.707	0.774	2.540	1.727	0.783	2.570
	1 1/2	40	1.906	48.4	1.882	47.8	0.114	2.9	2.171	0.984	3.230	2.198	0.997	3.270
	2	50	2.370	60.2	2.346	59.6	0.114	2.9	2.742	1.244	4.080	2.789	1.265	4.150
	2 1/2	65	2.992	76.0	2.961	75.2	0.126	3.2	3.837	1.740	5.710	3.918	1.777	5.830
	3	80	3.492	88.7	3.461	87.9	0.126	3.2	4.516	2.048	6.720	4.630	2.100	6.890
	4	100	4.484	113.9	4.449	113.0	0.142	3.6	6.552	2.972	9.750	6.721	3.048	10.000
Medium	1/4	8	0.547	13.9	0.524	13.3	0.091	2.3	0.431	0.195	0.641	0.433	0.197	0.645
	3/8	10	0.685	17.4	0.661	16.8	0.091	2.3	0.564	0.256	0.839	0.568	0.258	0.845
	1/2	15	0.854	21.7	0.831	21.1	0.102	2.6	0.813	0.369	1.210	0.820	0.372	1.220
	3/4	20	1.071	27.2	1.047	26.6	0.102	2.6	1.048	0.475	1.560	1.055	0.479	1.570
	1	25	1.346	34.2	1.315	33.4	0.126	3.2	1.620	0.735	2.410	1.633	0.741	2.430
	1 1/4	32	1.689	42.9	1.657	42.1	0.126	3.2	2.083	0.945	3.100	2.104	0.954	3.130
	1 1/2	40	1.921	48.8	1.890	48.0	0.126	3.2	2.399	1.088	3.570	2.426	1.100	3.610
	2	50	2.394	60.8	2.354	59.8	0.142	3.6	3.380	1.533	5.030	3.427	1.554	5.100
	2 1/2	65	3.016	76.6	2.969	75.4	0.142	3.6	4.328	1.963	6.440	4.402	1.996	6.550
	3	80	3.524	89.5	3.469	88.1	0.157	4.0	5.625	2.551	8.370	5.739	2.603	8.540
	4	100	4.524	114.9	4.461	113.3	0.177	4.5	8.199	3.718	12.200	8.401	3.810	12.500
	5	125	5.535	140.6	5.461	138.7	0.197	5.0	11.156	5.059	16.600	11.492	5.212	17.100
	6	150	6.539	166.1	6.461	164.1	0.197	5.0	13.239	6.004	19.700	13.643	6.187	20.300
Heavy	1/4	8	0.547	13.9	0.524	13.3	0.114	2.9	0.514	0.233	0.765	0.517	0.234	0.769
	3/8	10	0.685	17.4	0.661	16.8	0.114	2.9	0.685	0.311	1.020	0.692	0.314	1.030
	1/2	15	0.854	21.7	0.831	21.1	0.126	3.2	0.968	0.439	1.440	0.974	0.442	1.450
	3/4	20	1.071	27.2	1.047	26.6	0.126	3.2	1.257	0.570	1.870	1.263	0.573	1.880
	1	25	1.346	34.2	1.315	33.4	0.157	4.0	1.976	0.896	2.940	1.989	0.902	2.960
	1 1/4	32	1.689	42.9	1.657	42.1	0.157	4.0	2.554	1.158	3.800	2.574	1.167	3.830
	1 1/2	40	1.921	48.8	1.890	48.0	0.157	4.0	2.944	1.335	4.380	2.970	1.347	4.420
	2	50	2.394	60.8	2.354	59.8	0.177	4.5	4.160	1.887	6.190	4.207	1.908	6.260
	2 1/2	65	3.016	76.6	2.969	75.4	0.177	4.5	5.329	2.417	7.930	5.410	2.454	8.050
	3	80	3.524	89.5	3.469	88.1	0.197	5.0	6.922	3.139	10.300	7.057	3.200	10.500
	4	100	4.524	114.9	4.461	113.3	0.213	5.4	9.745	4.419	14.500	9.946	4.511	14.800
	5	125	5.535	140.6	5.461	138.7	0.213	5.4	12.030	5.456	17.900	12.366	5.608	18.400
	6	150	6.539	166.1	6.461	164.1	0.213	5.4	14.315	6.492	21.300	14.718	6.675	21.900

Pipe,Steel,Black and Hot-Dipped Zinc-Coated Welded and Seamless

ASME B36.10M-1996

Nominal Diameter		Outside Diameter		STD XS XXS	Sch. No.	Wall Thickness		Nominal Weight	
NPS	DN	in.	mm			in.	mm	lb/ft	kg/m
1/8"	---	0.405	10.3	---	10	0.049	1.24	0.19	0.28
1/8"	---	0.405	10.3	---	30	0.057	1.45	0.21	0.32
1/8"	---	0.405	10.3	STD	40	0.068	1.73	0.24	0.37
1/8"	---	0.405	10.3	XS	80	0.095	2.41	0.31	0.47
1/4"	---	0.540	13.7	---	10	0.065	1.65	0.33	0.49
1/4"	---	0.540	13.7	---	30	0.073	1.85	0.36	0.54
1/4"	---	0.540	13.7	STD	40	0.088	2.24	0.42	0.63
1/4"	---	0.540	13.7	XS	80	0.119	3.02	0.54	0.80
3/8"	10	0.675	17.1	---	10	0.065	1.65	0.42	0.63
3/8"	10	0.675	17.1	---	30	0.073	1.85	0.47	0.70
3/8"	10	0.675	17.1	STD	40	0.091	2.31	0.57	0.84
3/8"	10	0.675	17.1	XS	80	0.126	3.20	0.74	1.10
1/2"	15	0.840	21.3	---	10	0.083	2.11	0.67	1.00
1/2"	15	0.840	21.3	---	30	0.095	2.41	0.76	1.12
1/2"	15	0.840	21.3	STD	40	0.109	2.77	0.85	1.27
1/2"	15	0.840	21.3	XS	80	0.147	3.73	1.09	1.62
1/2"	15	0.840	21.3	---	160	0.188	4.78	1.31	1.95
1/2"	15	0.840	21.3	XXS	---	0.294	7.47	1.71	2.55
3/4"	20	1.050	26.7	---	10	0.083	2.11	0.86	1.28
3/4"	20	1.050	26.7	---	30	0.095	2.41	0.97	1.44
3/4"	20	1.050	26.7	STD	40	0.113	2.87	1.13	1.69
3/4"	20	1.050	26.7	XS	80	0.154	3.91	1.47	2.20
3/4"	20	1.050	26.7	---	160	0.219	5.56	1.94	2.90
3/4"	20	1.050	26.7	XXS	---	0.308	7.82	2.44	3.64
1"	25	1.315	33.4	---	10	0.109	2.77	1.40	2.09
1"	25	1.315	33.4	---	30	0.114	2.90	1.46	2.18
1"	25	1.315	33.4	STD	40	0.133	3.38	1.68	2.50
1"	25	1.315	33.4	XS	80	0.179	4.55	2.17	3.24
1"	25	1.315	33.4	---	160	0.250	6.35	2.84	4.24
1"	25	1.315	33.4	XXS	---	0.358	9.09	3.66	5.45
11/4"	32	1.660	42.2	---	10	0.109	2.77	1.81	2.69
11/4"	32	1.660	42.2	---	30	0.117	2.97	1.93	2.87
11/4"	32	1.660	42.2	STD	40	0.140	3.56	2.27	3.39
11/4"	32	1.660	42.2	XS	80	0.191	4.85	3.00	4.47
11/4"	32	1.660	42.2	---	160	0.250	6.35	3.76	5.61
11/4"	32	1.660	42.2	XXS	---	0.382	9.70	5.21	7.77
11/2"	40	1.900	48.3	---	10	0.109	2.77	2.09	3.11
11/2"	40	1.900	48.3	---	30	0.125	3.18	2.37	3.54

MEICAI
METAL

Pipe,Steel,Black and Hot-Dipped Zinc-Coated Welded and Seamless

ASME B36.10M-1996

Nominal Diameter		Outside Diameter		STD XS XXS	Sch. No.	Wall Thickness		Nominal Weight	
NPS	DN	in.	mm			in.	mm	lb/ft	kg/m
1 1/2"	40	1.900	48.3	STD	40	0.145	3.68	2.72	4.05
1 1/2"	40	1.900	48.3	XS	80	0.200	5.08	3.63	5.41
1 1/2"	40	1.900	48.3	---	160	0.281	7.14	4.86	7.25
1 1/2"	40	1.900	48.3	XXS	---	0.400	10.15	6.41	9.55
2"	50	2.375	60.3	---	---	0.083	2.11	2.03	3.03
2"	50	2.375	60.3	---	10	0.109	2.77	2.64	3.93
2"	50	2.375	60.3	---	30	0.125	3.18	3.00	4.48
2"	50	2.375	60.3	---	---	0.141	3.58	3.36	5.01
2"	50	2.375	60.3	STD	40	0.154	3.91	3.65	5.44
2"	50	2.375	60.3	---	---	0.172	4.37	4.05	6.03
2"	50	2.375	60.3	---	---	0.188	4.78	4.39	6.54
2"	50	2.375	60.3	XS	80	0.218	5.54	5.02	7.48
2"	50	2.375	60.3	---	---	0.250	6.35	5.67	8.45
2"	50	2.375	60.3	---	---	0.281	7.14	6.28	9.36
2"	50	2.375	60.3	---	160	0.344	8.74	7.46	11.11
2"	50	2.375	60.3	XXS	---	0.436	11.07	9.03	13.44
2 1/2"	65	2.875	73.0	---	---	0.109	2.77	3.22	4.80
2 1/2"	65	2.875	73.0	---	10	0.120	3.05	3.53	5.26
2 1/2"	65	2.875	73.0	---	---	0.125	3.18	3.67	5.48
2 1/2"	65	2.875	73.0	---	---	0.141	3.58	4.12	6.13
2 1/2"	65	2.875	73.0	---	---	0.156	3.96	4.53	6.74
2 1/2"	65	2.875	73.0	---	---	0.172	4.37	4.97	7.40
2 1/2"	65	2.875	73.0	---	30	0.188	4.78	5.40	8.04
2 1/2"	65	2.875	73.0	STD	40	0.203	5.16	5.79	8.63
2 1/2"	65	2.875	73.0	---	---	0.216	5.49	6.13	9.14
2 1/2"	65	2.875	73.0	---	---	0.250	6.35	7.01	10.44
2 1/2"	65	2.875	73.0	XS	80	0.276	7.01	7.66	11.41
2 1/2"	65	2.875	73.0	---	160	0.375	9.35	10.01	14.68
2 1/2"	65	2.875	73.0	XXS	---	0.552	14.02	13.69	20.39
3"	80	3.500	88.9	---	---	0.172	4.37	6.11	9.11
3"	80	3.500	88.9	---	30	0.188	4.78	6.65	9.92
3"	80	3.500	88.9	STD	40	0.216	5.49	7.58	11.29
3"	80	3.500	88.9	---	---	0.250	6.35	8.68	12.93
3"	80	3.500	88.9	---	---	0.281	7.14	9.66	14.40
3"	80	3.500	88.9	XS	80	0.300	7.62	10.25	15.27
3"	80	3.500	88.9	---	160	0.438	11.13	14.32	21.35
3"	80	3.500	88.9	XXS	---	0.600	15.24	18.58	27.68
3 1/2"	---	4.00	101.6	---	30	0.188	4.78	7.65	11.41
3 1/2"	---	4.00	101.6	STD	40	0.226	5.74	9.11	13.57
3 1/2"	---	4.00	101.6	---	---	0.250	6.35	10.01	14.92
3 1/2"	---	4.00	101.6	---	---	0.281	7.14	11.16	16.63
3 1/2"	---	4.00	101.6	XS	80	0.318	8.08	12.50	18.63

Pipe,Steel,Black and Hot-Dipped Zinc-Coated Welded and Seamless

ASME B36.10M-1996

Nominal Diameter		Outside Diameter		STD XS XXS	Sch. No.	Wall Thickness		Nominal Weight	
NPS	DN	in.	mm			in.	mm	lb/ft	kg/m
4″	100	4.500	114.3	---	30	0.188	4.78	8.66	12.91
4″	100	4.500	114.3	---	---	0.203	5.16	9.32	13.89
4″	100	4.500	114.3	---	---	0.219	5.56	10.01	14.91
4″	100	4.500	114.3	STD	40	0.237	6.02	10.79	16.07
4″	100	4.500	114.3	---	---	0.250	6.35	11.35	16.90
4″	100	4.500	114.3	---	---	0.281	7.14	12.66	18.87
4″	100	4.500	114.3	---	---	0.312	7.92	13.96	20.78
4″	100	4.500	114.3	XS	80	0.337	8.56	14.98	22.32
4″	100	4.500	114.3	---	120	0.438	11.13	19.00	28.32
4″	100	4.500	114.3	---	160	0.531	13.49	22.51	33.54
4″	100	4.500	114.3	XXS	---	0.674	17.12	27.54	41.03
5″	125	5.563	141.3	---	---	0.188	4.78	10.79	16.09
5″	125	5.563	141.3	---	---	0.219	5.56	12.50	18.61
5″	125	5.563	141.3	STD	40	0.258	6.55	14.62	21.77
5″	125	5.563	141.3	---	---	0.281	7.14	15.85	23.62
5″	125	5.563	141.3	---	---	0.312	7.92	17.50	26.05
5″	125	5.563	141.3	---	---	0.344	8.74	19.17	28.57
5″	125	5.563	141.3	XS	80	0.375	9.53	20.78	30.97
5″	125	5.563	141.3	---	120	0.500	12.70	27.04	40.28
5″	125	5.563	141.3	---	160	0.625	15.88	32.96	49.11
5″	125	5.563	141.3	XXS	---	0.750	19.05	38.55	57.43
6″	150	6.625	168.3	---	---	0.203	5.16	13.92	20.76
6″	150	6.625	168.3	---	---	0.219	5.56	14.98	22.31
6″	150	6.625	168.3	---	---	0.250	6.35	17.02	25.36
6″	150	6.625	168.3	STD	40	0.280	7.11	18.97	28.26
6″	150	6.625	168.3	---	---	0.312	7.92	21.04	31.32
6″	150	6.625	168.3	---	---	0.344	8.74	23.08	34.39
6″	150	6.625	168.3	---	---	0.375	9.53	25.03	37.31
6″	150	6.625	168.3	XS	80	0.432	10.97	28.57	42.56
6″	150	6.625	168.3	---	---	0.500	12.70	32.71	48.73
6″	150	6.625	168.3	---	120	0.562	14.27	36.39	54.20
6″	150	6.625	168.3	---	---	0.625	15.88	40.05	59.69
6″	150	6.625	168.3	---	160	0.719	18.26	45.35	67.56
6″	150	6.625	168.3	---	---	0.750	19.05	47.06	70.11
6″	150	6.625	168.3	XXS	---	0.864	21.95	53.16	79.22
6″	150	6.625	168.3	---	---	0.875	22.23	53.73	80.07
8″	200	8.625	219.1	---	20	0.250	6.35	22.36	33.31
8″	200	8.625	219.1	---	30	0.277	7.04	24.70	36.81
8″	200	8.625	219.1	---	---	0.312	7.92	27.70	41.24
8″	200	8.625	219.1	STD	40	0.322	8.18	28.55	42.55
8″	200	8.625	219.1	---	---	0.344	8.74	30.42	45.34
8″	200	8.625	219.1	---	---	0.375	9.53	33.04	49.25
8″	200	8.625	219.1	---	60	0.406	10.31	35.64	53.08
8″	200	8.625	219.1	---	---	0.438	11.13	38.30	57.08
8″	200	8.625	219.1	XS	80	0.500	12.70	43.39	64.64
8″	200	8.625	219.1	---	---	0.562	14.27	48.40	72.08

MEICAI
METAL

Pipe,Steel,Black and Hot-Dipped Zinc-Coated Welded and Seamless

ASME B36.10M-1996

Nominal Diameter		Outside Diameter		STD XS XXS	Sch. No.	Wall Thickness		Nominal Weight	
NPS	DN	in.	mm			in.	mm	lb/ft	kg/m
8"	200	8.625	219.1	---	100	0.594	15.09	50.95	75.92
8"	200	8.625	219.1	---	---	0.625	15.88	53.40	79.58
8"	200	8.625	219.1	---	120	0.719	18.26	60.71	90.44
8"	200	8.625	219.1	---	---	0.750	19.05	63.08	93.98
8"	200	8.625	219.1	---	140	0.812	20.62	67.76	100.92
8"	200	8.625	219.1	XXS	---	0.875	22.23	72.42	107.92
8"	200	8.625	219.1	---	160	0.906	23.01	74.69	111.27
8"	200	8.625	219.1	---	---	1.000	25.40	81.44	121.33
10"	250	10.750	273.0	---	20	0.250	6.35	28.04	41.75
10"	250	10.750	273.0	---	---	0.279	7.09	31.20	46.49
10"	250	10.750	273.0	---	30	0.307	7.80	34.24	51.01
10"	250	10.750	273.0	---	---	0.344	8.74	38.23	56.96
10"	250	10.750	273.0	STD	40	0.365	9.27	40.48	60.29
10"	250	10.750	273.0	---	---	0.438	11.13	48.24	71.87
10"	250	10.750	273.0	XS	60	0.500	12.70	54.74	81.52
10"	250	10.750	273.0	---	---	0.562	14.27	61.15	91.05
10"	250	10.750	273.0	---	80	0.594	15.09	64.43	95.97
10"	250	10.750	273.0	---	---	0.625	15.88	67.58	100.69
10"	250	10.750	273.0	---	100	0.719	18.26	77.03	114.71
10"	250	10.750	273.0	---	---	0.812	20.62	86.18	128.33
10"	250	10.750	273.0	---	120	0.844	21.44	89.29	133.00
10"	250	10.750	273.0	---	---	0.875	22.23	92.28	137.47
10"	250	10.750	273.0	---	---	0.938	23.83	98.30	146.42
10"	250	10.750	273.0	XXS	140	1.000	25.40	104.13	155.09
10"	250	10.750	273.0	---	160	1.125	28.58	115.64	172.26
10"	250	10.750	273.0	---	---	1.250	31.75	126.83	188.89
12"	300	12.750	323.8	---	20	0.250	6.35	33.38	49.71
12"	300	12.750	323.8	---	---	0.281	7.14	37.42	55.76
12"	300	12.750	323.8	---	---	0.312	7.92	41.45	61.69
12"	300	12.750	323.8	---	30	0.330	8.38	43.77	65.18
12"	300	12.750	323.8	---	---	0.344	8.74	45.58	67.90
12"	300	12.750	323.8	STD	---	0.375	9.53	49.56	73.86
12"	300	12.750	323.8	---	40	0.406	10.31	53.52	79.70
12"	300	12.750	323.8	---	---	0.438	11.13	57.59	85.82
12"	300	12.750	323.8	XS	---	0.500	12.70	65.42	97.43
12"	300	12.750	323.8	---	60	0.562	14.27	73.15	108.92
12"	300	12.750	323.8	---	---	0.625	15.88	80.93	120.58
12"	300	12.750	323.8	---	80	0.688	17.48	88.63	132.04
12"	300	12.750	323.8	---	---	0.750	19.05	96.12	143.16
12"	300	12.750	323.8	---	---	0.812	20.62	103.53	154.16
12"	300	12.750	323.8	---	100	0.844	21.44	107.32	159.86
12"	300	12.750	323.8	---	---	0.875	22.23	110.97	165.32
12"	300	12.750	323.8	XXS	120	1.000	25.40	125.49	186.91
12"	300	12.750	323.8	---	---	1.062	26.97	132.57	197.42

Pipe,Steel,Black and Hot-Dipped Zinc-Coated Welded and Seamless

ASME B36.10M-1996

Nominal Diameter		Outside Diameter		STD XS XXS	Sch. No.	Wall Thickness		Nominal Weight	
NPS	DN	in.	mm			in.	mm	lb/ft	kg/m
12"	300	12.750	323.8	---	140	1.125	28.58	139.67	208.07
12"	300	12.750	323.8	---	---	1.250	31.75	153.53	228.66
12"	300	12.750	323.8	---	160	1.312	33.32	160.27	238.68
14"	350	14.000	355.6	---	10	0.250	6.35	36.71	54.69
14"	350	14.000	355.6	---	---	0.281	7.14	41.17	61.35
14"	350	14.000	355.6	---	20	0.312	7.92	45.61	67.90
14"	350	14.000	355.6	---	---	0.344	8.74	50.17	74.76
14"	350	14.000	355.6	STD	30	0.375	9.53	54.57	81.33
14"	350	14.000	355.6	---	---	0.406	10.31	58.94	87.79
14"	350	14.000	355.6	---	40	0.438	11.13	63.44	94.55
14"	350	14.000	355.6	XS	---	0.500	12.70	72.09	107.39
14"	350	14.000	355.6	---	---	0.562	14.27	80.66	120.11
14"	350	14.000	355.6	---	60	0.594	15.09	85.05	126.71
14"	350	14.000	355.6	---	---	0.625	15.88	89.28	133.03
14"	350	14.000	355.6	---	80	0.750	19.05	106.13	158.10
14"	350	14.000	355.6	---	---	0.812	20.62	114.37	170.33
14"	350	14.000	355.6	---	---	0.875	22.23	122.65	182.75
14"	350	14.000	355.6	---	100	0.938	23.83	130.85	194.96
14"	350	14.000	355.6	---	---	1.000	25.40	138.84	206.83
14"	350	14.000	355.6	---	---	1.062	26.97	146.74	218.57
14"	350	14.000	355.6	---	120	1.094	27.79	150.79	224.65
14"	350	14.000	355.6	---	---	1.125	28.58	154.69	230.48
14"	350	14.000	355.6	---	140	1.250	31.75	170.21	253.56
14"	350	14.000	355.6	---	160	1.406	35.71	189.11	281.70
16"	400	16.000	406.4	---	---	0.281	7.14	47.17	70.30
16"	400	16.000	406.4	---	20	0.312	7.92	52.27	77.83
16"	400	16.000	406.4	---	---	0.344	8.74	57.52	85.71
16"	400	16.000	406.4	STD	30	0.375	9.53	62.58	93.27
16"	400	16.000	406.4	---	---	0.406	10.31	67.62	100.70
16"	400	16.000	406.4	---	---	0.469	11.91	77.79	115.86
16"	400	16.000	406.4	XS	40	0.500	12.70	82.77	123.30
16"	400	16.000	406.4	---	---	0.562	14.27	92.66	137.99
16"	400	16.000	406.4	---	---	0.625	15.88	102.63	152.93
16"	400	16.000	406.4	---	60	0.656	16.66	107.50	160.12
16"	400	16.000	406.4	---	---	0.750	19.05	122.15	181.97
16"	400	16.000	406.4	---	80	0.844	21.44	136.61	203.53
16"	400	16.000	406.4	---	---	1.000	25.40	160.20	238.64
16"	400	16.000	406.4	---	100	1.031	26.19	164.82	245.56
16"	400	16.000	406.4	---	---	1.062	26.97	169.43	252.35
18"	450	18.000	457	---	---	0.281	7.14	53.18	79.21
18"	450	18.000	457	---	20	0.312	7.92	58.94	87.71
18"	450	18.000	457	---	---	0.344	8.74	64.87	96.61
18"	450	18.000	457	STD	---	0.375	9.53	70.59	105.16
18"	450	18.000	457	---	---	0.406	10.31	76.29	113.57
18"	450	18.000	457	---	30	0.438	11.13	82.15	122.38
18"	450	18.000	457	---	---	0.469	11.91	87.81	130.72

MEICAI
METAL

Pipe,Steel,Black and Hot-Dipped Zinc-Coated Welded and Seamless

ASME B36.10M-1996

Nominal Diameter		Outside Diameter		STD XS XXS	Sch. No.	Wall Thickness		Nominal Weight	
NPS	DN	in.	mm			in.	mm	lb/ft	kg/m
18"	450	18.000	457	XS	---	0.500	12.70	93.45	139.15
18"	450	18.000	457	---	40	0.562	14.27	104.67	155.80
18"	450	18.000	457	---	---	0.625	15.88	115.98	172.74
18"	450	18.000	457	---	60	0.750	19.05	138.17	205.74
18"	450	18.000	457	---	---	0.812	20.62	149.06	221.89
18"	450	18.000	457	---	---	0.875	22.23	160.03	238.34
18"	450	18.000	457	---	80	0.938	23.83	170.92	254.55
18"	450	18.000	457	---	---	1.000	25.40	181.56	270.34
18"	450	18.000	457	---	---	1.062	26.97	192.11	286.00
18"	450	18.000	457	---	---	1.125	28.58	202.75	301.94
18"	450	18.000	457	---	100	1.156	29.36	207.96	309.62
18"	450	18.000	457	---	---	1.188	30.18	213.31	317.66
20"	500	20.000	508	---	---	0.344	8.74	72.21	107.60
20"	500	20.000	508	STD	20	0.375	9.53	78.60	117.15
20"	500	20.000	508	---	---	0.406	10.31	84.96	126.53
20"	500	20.000	508	XS	30	0.500	12.70	104.13	155.12
20"	500	20.000	508	---	---	0.562	14.27	116.67	173.74
20"	500	20.000	508	---	40	0.594	15.09	123.11	183.42
20"	500	20.000	508	---	---	0.625	15.88	129.33	192.71
20"	500	20.000	508	---	---	0.750	19.05	154.19	229.70
20"	500	20.000	508	---	60	0.812	20.62	166.40	247.83
20"	500	20.000	508	---	---	0.875	22.23	178.72	266.30
20"	500	20.000	508	---	---	0.938	23.83	190.96	284.52
20"	500	20.000	508	---	80	1.031	26.19	208.87	311.17
20"	500	20.000	508	---	---	1.062	26.97	214.80	319.92
20"	500	20.000	508	---	---	1.125	28.58	226.78	337.89
22"	500	22.000	559	---	---	0.344	8.74	79.56	118.60
22"	500	22.000	559	STD	20	0.375	9.53	86.61	129.13
22"	500	22.000	559	---	---	0.406	10.31	93.63	139.50
22"	500	22.000	559	---	---	0.438	11.13	100.86	150.37
22"	500	22.000	559	---	---	0.469	11.91	107.85	160.68
22"	500	22.000	559	XS	30	0.500	12.70	114.81	171.09
22"	500	22.000	559	---	---	0.562	14.27	128.67	191.69
22"	500	22.000	559	---	---	0.625	15.88	142.68	212.69
22"	500	22.000	559	---	---	0.812	20.62	183.75	273.76
22"	500	22.000	559	---	60	0.875	22.23	197.41	294.25
22"	500	22.000	559	---	---	0.938	23.83	211.00	314.49
22"	500	22.000	559	---	80	1.125	28.58	250.81	373.83
22"	500	22.000	559	---	---	1.188	30.18	264.06	393.57
22"	500	22.000	559	---	---	1.250	31.75	277.01	412.81
22"	500	22.000	559	---	100	1.375	34.93	302.88	451.42
24"	600	24.000	610	---	---	0.344	8.74	86.91	129.59
24"	600	24.000	610	STD	20	0.375	9.53	94.62	141.12
24"	600	24.000	610	---	---	0.406	10.31	102.31	152.47
24"	600	24.000	610	---	---	0.438	11.13	110.22	164.37

Pipe,Steel,Black and Hot-Dipped Zinc-Coated Welded and Seamless

ASME B36.10M-1996

Nominal Diameter		Outside Diameter		STD XS XXS	Sch. No.	Wall Thickness		Nominal Weight	
NPS	DN	in.	mm			in.	mm	lb/ft	kg/m
24″	600	24.000	610	---	---	0.469	11.91	117.86	175.66
24″	600	24.000	610	XS	---	0.500	12.70	125.49	187.06
24″	600	24.000	610	---	30	0.562	14.27	140.68	209.64
24″	600	24.000	610	---	---	0.625	15.88	156.03	232.66
24″	600	24.000	610	---	40	0.688	17.48	171.29	255.41
24″	600	24.000	610	---	---	0.875	22.23	216.10	322.21
24″	600	24.000	610	---	---	0.938	23.83	231.03	344.46
24″	600	24.000	610	---	60	0.969	24.61	238.35	355.26
24″	600	24.000	610	---	---	1.062	26.97	260.17	387.76
24″	600	24.000	610	---	---	1.125	28.58	274.84	409.77
24″	600	24.000	610	---	---	1.188	30.18	289.44	431.52
24″	600	24.000	610	---	80	1.219	30.96	296.58	442.08
24″	600	24.000	610	---	---	1.250	31.75	303.71	452.74
24″	600	24.000	610	---	---	1.312	33.32	317.91	473.84
26″	600	26.000	660	STD	---	0.375	9.53	102.63	152.87
26″	600	26.000	660	---	---	0.406	10.31	110.98	165.18
26″	600	26.000	660	XS	20	0.500	12.70	136.17	202.72
26″	600	26.000	660	---	---	0.562	14.27	152.68	227.23
26″	600	26.000	660	---	---	0.750	19.05	202.25	301.10
26″	600	26.000	660	---	---	0.812	20.62	218.43	325.12
28″	700	28.000	711	STD	---	0.375	9.53	110.64	164.85
28″	700	28.000	711	---	---	0.406	10.31	119.65	178.15
28″	700	28.000	711	---	---	0.438	11.13	128.93	192.09
28″	700	28.000	711	---	---	0.469	11.91	137.90	205.32
28″	700	28.000	711	XS	20	0.500	12.70	146.85	218.69
28″	700	28.000	711	---	---	0.562	14.27	164.69	245.18
28″	700	28.000	711	---	30	0.625	15.88	182.73	271.21
28″	700	28.000	711	---	---	0.688	17.48	200.68	298.95
28″	700	28.000	711	---	---	0.750	19.05	218.27	325.06
28″	700	28.000	711	---	---	0.812	20.62	235.78	351.05
30″	700	30.000	762	STD	---	0.375	9.53	118.65	176.84
30″	700	30.000	762	---	---	0.406	10.31	128.32	191.11
30″	700	30.000	762	---	---	0.438	11.13	138.29	206.09
30″	700	30.000	762	XS	20	0.500	12.70	157.53	234.67
30″	700	30.000	762	---	---	0.562	14.27	176.69	263.12
30″	700	30.000	762	---	30	0.625	15.88	196.08	292.18
30″	700	30.000	762	---	---	0.688	17.48	215.38	320.93
30″	700	30.000	762	---	---	0.750	19.05	234.29	349.02
30″	700	30.000	762	---	---	0.812	20.62	253.12	376.98
30″	700	30.000	762	---	---	1.000	25.40	309.72	461.38
30″	700	30.000	762	---	---	1.062	26.97	328.22	488.85
30″	700	30.000	762	---	---	1.125	28.58	346.93	516.90

MEICAI METAL

Casing(Group1)

API 5CT–2001

Size				Nominal Weight						Test Pressure(psi)				Type of Thread		
Outside Diameter		Wall Thickness		Plain ends			Threads and Couplings			H–40		J–55&K–55		Short	Long	Butt–ress
in.	mm	in.	mm	lb/ft	kg/ft	kg/m	lb/ft	kg/ft	kg/m	Std.	Alt.	Std.	Alt.			
4 1/2	114.3	0.205	5.21	9.41	4.26	13.99	9.50	4.31	14.14	2,900	--	3,000	4,000	×		
		0.224	5.69	10.24	4.64	15.22	10.50	4.76	15.63			3,000	4,400	×		×
		0.250	6.35	11.36	5.15	16.89	11.60	5.26	17.26			3,000	4,900	×	×	×
5	127.0	0.220	5.59	11.24	5.09	16.71	11.50	5.22	17.11			3,000	3,900	×		
		0.253	6.43	12.84	5.82	19.09	13.00	5.90	19.35			3,000	4,500	×	×	×
		0.296	7.52	14.88	6.74	22.13	15.00	6.80	22.32			3,000	5,200	×	×	×
5 1/2	139.7	0.244	6.20	13.71	6.21	20.39	14.00	6.35	20.83	2,800	--	3,000	3,900	×		
		0.275	6.98	15.36	6.96	22.84	15.50	7.03	23.07			3,000	4,400	×	×	×
		0.304	7.72	16.89	7.65	25.11	17.00	7.71	25.30			3,000	4,900	×	×	×
6 5/8	168.3	0.288	7.32	19.51	8.84	29.01	20.00	9.07	29.76	2,800	--	--	--	×		
		0.288	7.32	19.51	8.84	29.01	20.00	9.07	29.76			3,000	3,800	×	×	×
		0.352	8.94	23.60	10.70	35.09	24.00	10.89	35.72			3,000	4,700	×	×	×
7	177.8	0.231	5.87	16.72	7.57	24.85	17.00	7.71	25.30	2,100	--	--	--	×		
		0.272	6.91	19.56	8.86	29.08	20.00	9.07	29.76	2,500	--	3,000	3,400	×		
		0.317	8.05	22.65	10.26	33.68	23.00	10.43	34.23			3,000	4,000	×	×	×
		0.362	9.19	25.69	11.64	38.19	26.00	11.79	38.69			3,000	4,600	×	×	×
7 5/8	193.7	0.300	7.62	23.49	10.65	34.95	24.00	10.89	35.72	2,500	--	--	--	×		
		0.328	8.33	25.59	11.59	38.04	26.40	11.97	39.29			3,000	3,800	×	×	×
8 5/8	219.1	0.264	6.71	23.60	10.69	35.08	24.00	10.89	35.72		--	2,700	--	×		
		0.304	7.72	27.04	12.26	40.21	28.00	12.70	41.67	2,300	--	--	--	×		
		0.352	8.94	31.13	14.11	46.28	32.00	14.51	47.62	2,600				×		
		0.352	8.94	31.13	14.11	46.28	32.00	14.51	47.62			3,000	3,600	×	×	×
		0.400	10.16	35.17	15.94	52.30	36.00	16.33	53.58			3,000	4,100	×	×	×
9 5/8	244.5	0.312	7.92	31.06	14.07	46.18	32.30	14.65	48.07	2,100	--	--	--	×		
		0.352	8.94	34.89	15.81	51.88	36.00	16.33	53.58	2,300	--	--	--	×		
		0.352	8.94	34.89	15.81	51.88	36.00	16.33	53.58			3,000	3,200	×	×	×
		0.395	10.03	38.97	17.66	57.95	40.00	18.14	59.53			3,000	3,600	×	×	×
10 3/4	273.0	0.279	7.09	31.23	14.15	46.43	32.75	14.86	48.74	1,200	1,700	--	--	×		
		0.350	8.89	38.91	17.64	57.86	40.50	18.37	60.27	1,600	2,100	--	--	×		
		0.350	8.89	38.91	17.64	57.86	40.50	18.37	60.27			2,100	2,900	×		×
		0.400	10.16	44.26	20.06	65.81	45.50	20.64	67.71			2,500	3,300	×		×
		0.450	11.43	49.55	22.45	73.67	51.00	23.13	75.90			2,800	3,700	×		×
11 3/4	298.4	0.333	8.46	40.64	18.42	60.42	42.00	19.05	62.50	1,400	1,800	--	--	×		
		0.375	9.52	45.60	20.67	67.80	47.00	21.32	69.95			2,100	2,800	×		×
		0.435	11.05	52.62	23.85	78.23	54.00	24.49	80.36			2,400	3,300	×		×
		0.489	12.42	58.87	26.68	87.52	60.00	27.22	89.29			2,700	3,700	×		×
13 3/8	339.7	0.330	8.38	46.02	20.86	68.43	48.00	21.77	71.43	1,200	1,600	--	--	×		
		0.380	9.65	52.79	23.92	78.49	54.50	24.72	81.11			1,900	2,500	×		×
		0.430	10.92	59.50	26.97	88.47	61.00	27.67	90.78			2,100	2,800	×		×
		0.480	12.19	66.17	29.99	98.38	68.00	30.84	101.20			2,400	3,200	×		×
16	406.4	0.375	9.52	62.64	28.39	93.13	65.00	29.48	96.73	1,100	--	--	--	×		
		0.438	11.13	72.86	32.99	108.22	75.00	34.02	111.62			1,800	--	×		×
		0.495	12.57	82.05	37.18	121.99	84.00	38.10	125.01			2,000	--	×		×
18 5/8	473.1	0.435	11.05	84.59	38.33	125.77	87.50	39.69	130.22	1,100	--	--	--	×		
		0.435	11.05	84.59	38.33	125.77	87.50	39.69	130.22			1,500	--	×		×
20	508.0	0.438	11.13	91.59	41.51	136.19	94.00	42.64	139.89	1,100	--	--	--	×	×	
		0.438	11.13	91.59	41.51	136.19	94.00	42.64	139.89			1,400	--	×	×	×
		0.500	12.70	104.23	47.23	154.97	106.50	48.31	158.49			1,600	--	×	×	×

Tubing(Group1)

API 5CT–2001

Size				Nominal Weight						Test Pressure(psi)				Type of Ends
Outside Diameter		Wall Thickness		Plain Ends			Threads and Couplings			H–40		J–55&K–55		
in.	mm	in.	mm	lb/ft	kg/ft	kg/m	lb/ft	kg/ft	kg/m	Std.	Alt.	Std.	Alt.	
1.050	26.7	0.113	2.87	1.13	0.51	1.68	1.14	0.52	1.70	3,000	6,900	3,000	9,500	Non–Upset
		0.113	2.87	1.13	0.51	1.68	1.20	0.54	1.79	3,000	6,900	3,000	9,500	Ext.Upset
1.315	33.4	0.133	3.38	1.68	0.76	2.50	1.70	0.77	2.53	3,000	6,500	3,000	8,900	Non–Upset
		0.133	3.38	1.68	0.76	2.50	1.72	0.78	2.56	3,000	6,500	3,000	8,900	Integral Joint
		0.133	3.38	1.68	0.76	2.50	1.80	0.82	2.68	3,000	6,500	3,000	8,900	Ext.Upset
1.660	42.2	0.125	3.18	2.05	0.93	3.05	2.10	0.95	3.13	3,000	4,800	3,000	6,600	Integral Joint
		0.140	3.56	2.27	1.03	3.38	2.30	1.04	3.42	3,000	5,400	3,000	7,400	Non–Upset
		0.140	3.56	2.27	1.03	3.38	2.33	1.06	3.47	3,000	5,400	3,000	7,400	Integral Joint
		0.140	3.56	2.27	1.03	3.38	2.40	1.09	3.57	3,000	5,400	3,000	7,400	Ext.Upset
1.900	48.3	0.125	3.18	2.37	1.08	3.53	2.40	1.09	3.57	3,000	4,200	3,000	5,800	Integral Joint
		0.145	3.68	2.72	1.23	4.05	2.75	1.25	4.09	3,000	4,900	3,000	6,700	Non–Upset
		0.145	3.68	2.72	1.23	4.05	2.76	1.25	4.11	3,000	4,900	3,000	6,700	Integral Joint
		0.145	3.68	2.72	1.23	4.05	2.90	1.32	4.32	3,000	4,900	3,000	6,700	Ext.Upset
2.063	52.4	0.156	3.96	3.18	1.44	4.73	3.25	1.47	4.84	3,000	4,800	3,000	6,700	Integral Joint
2 3/8	60.3	0.167	4.24	3.94	1.79	5.86	4.00	1.81	5.95	3,000	4,500	3,000	6,200	Non–Upset
		0.190	4.83	4.44	2.01	6.59	4.60	2.09	6.85	3,000	5,100	3,000	7,000	Non–Upset
		0.190	4.83	4.44	2.01	6.59	4.70	2.13	6.99	3,000	5,100	3,000	7,000	Ext.Upset
2 7/8	73.0	0.217	5.51	6.17	2.79	9.17	6.40	2.90	9.52	3,000	4,800	3,000	6,600	Non–Upset
		0.217	5.51	6.17	2.79	9.17	6.50	2.95	9.67	3,000	4,800	3,000	6,600	Ext.Upset
3 1/2	88.9	0.216	5.49	7.58	3.44	11.28	7.70	3.49	11.46	3,000	3,900	3,000	5,400	Non–Upset
		0.254	6.45	8.81	4.00	13.11	9.20	4.17	13.69	3,000	4,600	3,000	6,400	Ext.Upset
		0.254	6.45	8.81	4.00	13.11	9.30	4.22	13.84	3,000	4,600	3,000	6,400	Ext.Upset
		0.289	7.34	9.92	4.50	14.75	10.20	4.63	15.18	3,000	5,300	3,000	7,300	Non–Upset
4	101.6	0.226	5.74	9.12	4.13	13.56	9.50	4.31	14.14	3,000	3,600	3,000	5,000	Non–Upset
		0.262	6.65	10.47	4.74	15.57	11.00	4.99	16.37	3,000	4,200	3,000	5,800	Ext.Upset
4 1/2	114.3	0.271	6.88	12.25	5.55	18.22	12.60	5.72	18.75	3,000	3,900	3,000	5,300	Non–Upset
		0.271	6.88	12.25	5.55	18.22	12.75	5.78	18.97	3,000	3,900	3,000	5,300	Ext.Upset


MEICAI
METAL

Size Availability

OD \ WT	0.70	1.00	1.20	1.40	1.50	2.00	2.50	2.75	3.00	3.50	3.75	4.00	5.00	6.00	7.00	7.50	8.00	8.50	9.00	9.50	10.00	10.50	11.00	11.20	12.00
20*20	■	■																							
20*25	■	■	■																						
20*38	■	■	■	■	■																				
20*40	■	■	■	■	■	■	■	■	■	■															
20*50	■	■	■	■	■	■	■	■	■	■															
20*60	■	■	■	■	■	■	■	■	■	■															
25*25		■	■	■	■	■	■	■	■	■															
25*50		■	■	■	■	■	■	■	■	■															
25*38		■	■	■	■	■	■	■	■	■															
25*40		■	■	■	■	■	■	■	■	■															
25*60		■	■	■	■	■	■	■	■	■															
30*30		■	■	■	■	■	■	■	■	■															
30*40		■	■	■	■	■	■	■	■	■															
30*50		■	■	■	■	■	■	■	■	■															
30*60		■	■	■	■	■	■	■	■	■															
38*38		■	■	■	■	■	■	■	■	■															
38*75		■	■	■	■	■	■	■	■	■															
40*40		■	■	■	■	■	■	■	■	■	■														
40*50		■	■	■	■	■	■	■	■	■	■														
40*60		■	■	■	■	■	■	■	■	■	■	■													
40*80		■	■	■	■	■	■	■	■	■	■	■	■	■											
40*100		■	■	■	■	■	■	■	■	■	■	■	■	■											
50*50						■	■	■	■	■	■	■	■	■											
50*70						■	■	■	■	■	■	■	■	■											
50*90						■	■	■	■	■	■	■	■	■											
50*100						■	■	■	■	■	■	■	■	■											
60*60						■	■	■	■	■	■	■	■	■											
60*80						■	■	■	■	■	■	■	■	■											
60*90						■	■	■	■	■	■	■	■	■											
60*100							■	■	■	■	■	■	■	■											
60*120							■	■	■	■	■	■	■	■											
70*70							■	■	■	■	■	■	■	■											
75*75							■	■	■	■	■	■	■	■											
80*80							■	■	■	■	■	■	■	■											
80*100							■	■	■	■	■	■	■	■											
80*120							■	■	■	■	■	■	■	■											
80*160								■	■	■	■	■	■	■											
90*90								■	■	■	■	■	■	■											
100*100								■	■	■	■	■	■	■											
100*150								■	■	■	■	■	■	■											
120*120								■	■	■	■	■	■	■	■	■	■								
125*125								■	■	■	■	■	■	■	■	■	■								
135*135								■	■	■	■	■	■	■	■	■	■								
140*140								■	■	■	■	■	■	■	■	■	■								
150*150										■	■	■	■	■	■	■	■	■	■						
160*160										■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
170*170										■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
180*180										■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
180*100										■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
190*190										■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
200*100										■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
200*120										■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
200*150										■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
250*100										■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
200*200										■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
250*150										■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
300*300										■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
350*350										■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
400*400										■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■


CHINA



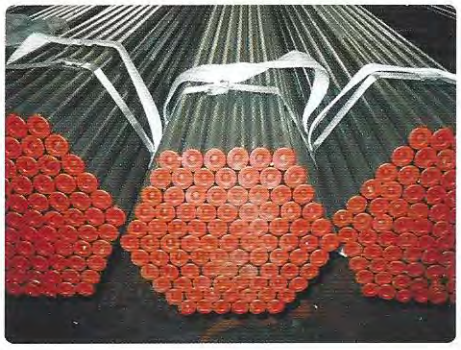









TIANJIN MEICAI METAL TRADING CO.,LTD
TIANJIN JIEFENG STEEL PIPE MANUFACTURE CO.,LTD

Address: Room 1502,Beichen Building 2,Beichen District,Tianjin,China
Tel: 86-22-26981589 26887199 Fax: 86-22-26888826
E-mail: sales@meicaimetal.com sales1@meicaimetal.com
Website: www.meicaipipes.com