
CO2 EXTINGUISHING SYSTEM

CO2 System Setup With Solenoid Actuated Pilot Cylider

Item	Part No.	Description
1	CO2001-CS-450-KV	45Kg CO2 cylinder
2	CO2023-BR-XXX-XX	CO2 K Valve
3	CO2005-RB-015-BK	12/" x 18" Discharge hose with Check Valve
4	CO2058-RB-300-BK	Pilot loop 14/ ' x300mm
5	CO2054-CS-020-SP	Pilot cylinder with Solenoid valve 2.0kg
6	CO2014-BR-003-NA	Vent bleed valve 34/' BSP
7	CO2069-BR-020-NA	Safty valve 34/" BSP
8	CO2058-RB-457-BK	Pilot loop 14/" x 457 mm

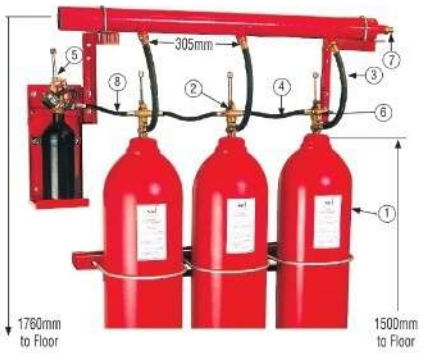

CO2 CYLIDER 68L

- Test Pressure : 250 Bar
- Empty Weight : 75 Kg
- Finishing : Red
- CO2 Capacity : 45 Kg
- Manufacture to : BS5045Part1
- Material : Mn Steel, Thread : 28.8 x 14"TPI
- Filling Ratio : 0.667
- Develop Pressure : 70Bar (1015Psi) @20° C



CODE No.	CO2001-CS-450-KV

CO2 K VALVE

- Material : BrassCZ122
- Test Pressure : 250 Bar
- Burst Disc pressure : 200-250 Bar
- Pneumatic actuation pressure : 1.5 Bar



CODE No.	Description
CO2023-BR-XXX-XX	CO2K-Valve
CO2022-MS-005-ZP	Manual Lever

PILOT CYLINDER SOLENOID ACTUATED

Size	Code No.
1.25Kg CO2	C02054-CS-001-SP
2Kg CO2	C02054-CS-020-SP



Head Office: 142 Central Axis - Fifth District- 6 of October
Ali El din Complex - Beside Leilet el Qadr - 6 of October
12 Nagib El-Rehany St, From El-Gomhoria st, Downtown
44 El-Atarin Mosque St, Alexandria
www.int-center.net

Tel: 0236860865 - 0236860864
Tel: 0238838732 - 0238838598
Tel: 01154002108
Tel: 01001297012
E-mail : info@int-center.net

UL LISTED FM APPROVED NFPA VdS LPCB